

INDION[®] ASM

Description

INDION ASM is an ion exchange resin based media designed to selectively remove arsenic from ground water without affecting the characteristics of influent water.

INDION ASM performs well, even in the presence of common anions such as chlorides, sulphates or bicarbonates. INDION ASM is used like conventional ion exchange resins.

Characteristics

Appearance	:	Reddish brown beads
Matrix	:	Isoporous
Moisture holding capacity	:	47 - 54 %
Shipping weight	:	800 g/l, approximately
True density	:	1.145 g/ml, approximately
Particle size range	:	0.3 mm to 1.2 mm

Operating parameters :

Maximum operating temperature	:	60° C
Operating pH range	:	6.5 to 9.0
Arsenic adsorption capacity	:	0.5 - 2.0 g /l
Static arsenic adsorption capacity	:	25 - 37 mg /g
Recommended contact time	:	2.5 to 5 minutes (Typical 3 minutes)
Specific service flow rate	:	Typical 20 - 30 BV/h
Minimum bed depth	:	0.5 m

Salient features

- INDION ASM Selectively removes arsenic in presence of other anions.
- It removes As III as well as AS IV.
- INDION ASM is operated like conventional ion exchange resins and operates at conventional pressures.
- Physically stable during usage, does not generate fines.
- Effluent arsenic levels does not exceed influent levels at any point of normal operation.
- Ideal for municipal and residential POE & POU devices.
- INDION ASM was tested for Volatile organic compounds VOC's, and found to be within the drinking standard as per EPA 8021 B.
- Water treated through INDION ASM was tested for oral toxicity as per IP (Indian Pharmacopoeia) and found to be safe for human consumption.
- Exhausted INDION ASM is non toxic and safe for disposal as per TCLP (Toxicity characteristic leaching procedure as per EPA 1311). Please follow Local regulations for disposal.

Note: -

- It is recommended to pre-treat and pre-filter the influent water to obtain best results.
- The desirable influent water quality must be within the specified limits.
- Turbidity 1 NTU, Iron - < 0.5 ppm, Manganese - < 0.5 ppm, Oil & grease Nil, Organics Nil, Arsenic 3000 ppb max.
- Presence of Phosphates, Vanadium and Silica can affect the Arsenic removal capacity.


Field performance of Arsenic removal unit.

Point of use unit:-

Location: Block Development Office,
Dist. Nadia, West Bengal

Inlet feed water quality

Sr.no.	Parameters	Values
1	pH	7.30
2	Conductivity	600 - 700 $\mu\text{s} / \text{cm}$
3	Alkalinity	352 ppm as CaCO_3
4	Total Hardness	340 ppm as CaCO_3
5	Iron	0.5 to 1 ppm as Fe
6	Arsenic	0.2 ppm as As
7	Treatment flow rate LPH	60 - 90

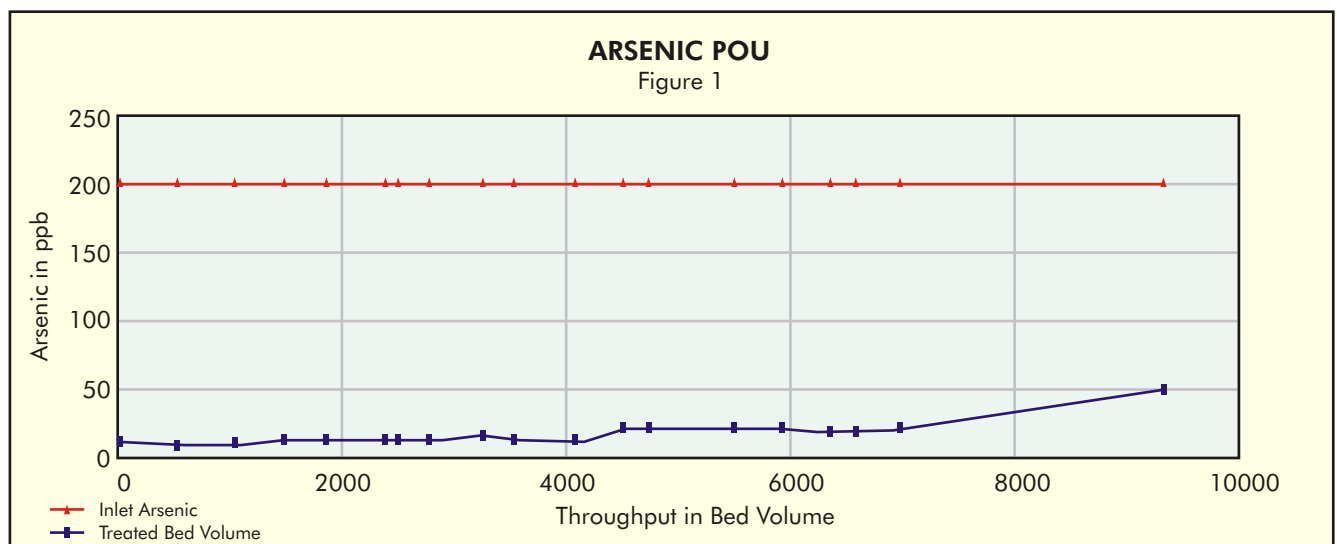


Field performance of Arsenic removal unit.

Hand pump attachment unit: -

Location: Govindpur Haldarpada,
at Debogram (Dist Nadia), West Bengal

Inlet feed water quality

Sr.no.	Parameters	Values
1	pH	7.40
2	Conductivity	600 - 700 $\mu\text{s} / \text{cm}$
3	Alkalinity	264 ppm as CaCO_3
4	Total Hardness	240 ppm as CaCO_3
5	Iron	0.5 to 1 ppm as Fe
6	Arsenic	0.15 - 0.2 ppm as As
7	Treatment flow rate LPH	600 - 700

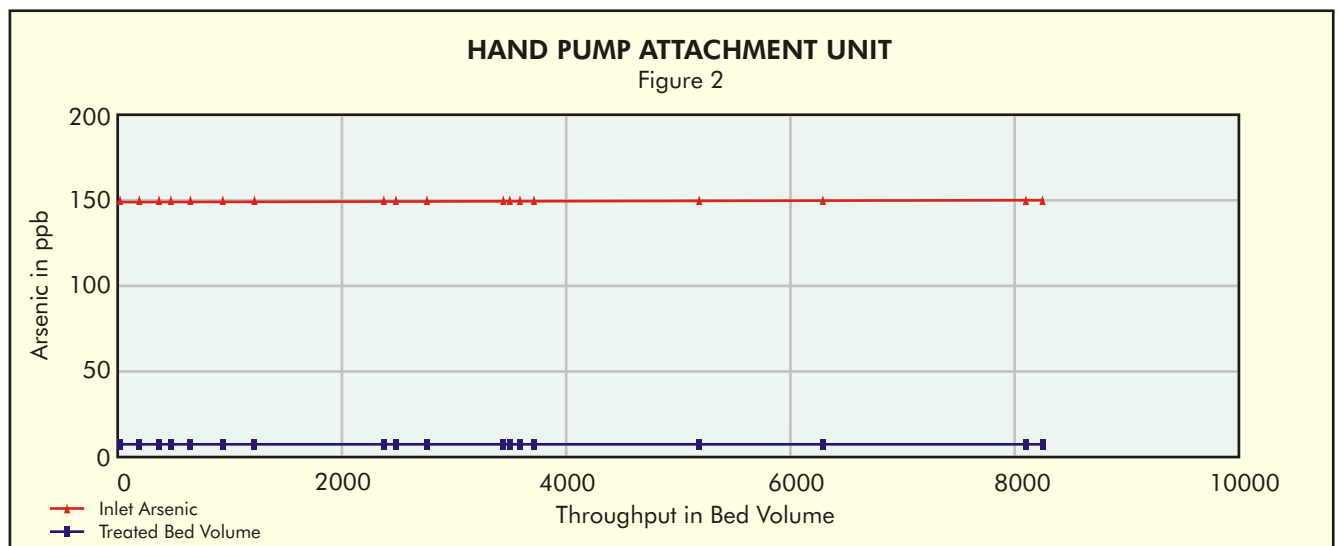

Packing

HDPE Lined bags	25/ 50 lts	LDPE bags	1 cft / 25 lts
Super sack	1000 lts	Super sack	35 cft
MS drums with liner bags	180 lts	Fiber drums with liner bags	7 cft

Storage

Ion exchange resins require proper care at all times. The resins must never be allowed to become dry. Repeated drying and rewetting produce stresses analogous to those due to osmotic shock and can lead to fragmentation of Ion exchangers.

Safety

During storage and usage contact with oxidizing agents must be avoided to prevent accidents and damage to the resin.

INDION range of Ion Exchange resins are produced in a state of the art ISO 9001 and ISO 14001 certified manufacturing facilities at Ankleshwar, in the state of Gujarat in India. This product data sheet (issue 09/2008) replaces previous issues.

To the best of our knowledge the information contained in this publication is accurate. Ion Exchange (India) Ltd. maintains a policy of continuous development and reserves the right to amend the information given herein without notice.

INDION is the registered trademark



CORPORATE OFFICE

Tiecicon House, Dr. E. Moses Road, Mahalaxmi, Mumbai 400 011
Tel: 022-3989 0909 Fax: 022-2493 8737
E-mail: ieil@ionexchange.co.in ; hocro@ionexchange.co.in

INTERNATIONAL DIVISION

R-14, T.T.C MIDC, Thane-Belapur Road, Rabale, Navi Mumbai 400 705
Tel: 022-3989 0909/3047 2400 Fax: 022-2769 7918
E-mail: rabcrointl@ionexchange.co.in; export.sales@ionexchange.co.in

REGIONAL OFFICES

- **Chennai** - Tel: 044-3910 2900/ 3989 0909 Fax: 044-2815 3361
E-mail: checro@ionexchange.co.in
- **Delhi** - Tel: 011-3989 0909/3054 3200 Fax: 011-2577 4837
E-mail: delcro@ionexchange.co.in
- **Kolkata** - Tel: 033-3989 0909/3043 3400 Fax: 033-2400 4345
E-mail: calcro@ionexchange.co.in
- **Vashi** - Tel: 022-3989 0909/3913 2300 Fax: 022-2788 9839
E-mail: mumcro@ionexchange.co.in

BRANCH OFFICES

- **Bangalore** - Tel:-080-3251 6205, Cell:09341247700
E-mail: bngcro@ionexchange.co.in
- **Chandigarh** - Tel: 0172-274 5011 Fax: 0172-274 4594
E-mail: delcro@ionexchange.co.in
- **Hyderabad** - Tel: 040-3066 3101/02/03 Fax: 040-3066 3104
E-mail: hydrcro@ionexchange.co.in
- **Lucknow** - Tel: 0522-301 3401/02 Fax: 0522- 301 3401
E-mail: luk.general@ionexchange.co.in
- **Pune** - Tel: 020-3062 6160 Fax: 020-2714 6109
E-mail: pun.general@ionexchange.co.in
- **Vadodara** - Tel: 0265-239 6506/6507 Fax: 0265-239 8508
E-mail: brdcro@ionexchange.co.in
- **Vizag** - Tel: 0891-324 6253
E-mail: sales.vizag@ionexchange.co.in

FACTORIES

• Ankleshwar • Hosur • Patancheru • Rabale • Verna

ALL INDIA NETWORK OF SERVICE COMPANIES AND DEALERS

Visit us at : www.ionindia.com