

INDION® ISR

Iron Specific Resin

Description

INDION ISR is a special media designed to provide excellent catalytic properties to remove dissolved iron from ground water. INDION ISR is an insoluble media which oxidizes dissolved ferrous iron (Fe^{2+}) to insoluble ferric iron (Fe^{3+}).

The insoluble iron thus formed gets trapped in the bed and is effectively filtered. A simple water backwash removes these trapped iron particles from the bed.

Characteristics

Appearance	:	Black, Moist spherical beads
Shipping weight	:	760 kgs/m ³ , approximately
Particle size	:	0.3 to 1.2 mm
> 1.2 mm	:	5.0 %, maximum
< 0.3 mm	:	1.0 %, maximum
Effective size	:	0.45 to 0.55 mm
Uniformity co-efficient	:	1.7, maximum
Moisture content	:	46 - 52%

Recommended influent conditions

pH range	:	> 6.5
Dissolved oxygen	:	Greater than 15% of Iron content
Alkalinity ,minimum	:	100 ppm or 10% of chlorides and sulfates Combined , whichever is less
Oil and Free chlorine	:	Nil
Organic matter	:	Less than 1.0 ppm
Total dissolved solids	:	2500 ppm , maximum
Total suspended solids	:	10 ppm , maximum
Temperature range	:	15° - 45° C

Suggested operating conditions

A. Upto 10.0 ppm feed iron

Bed depth	: 0.7 - 1.5 m, minimum
Service velocity	: 15 m/h
Backwash velocity	: 26 - 30 m/h
Backwash bed expansion	: 40 - 50%
Backwash time	: 15 - 20 minutes
Backwash frequency	: 8 - 10 hrs or ΔP of 1.0 kg/cm ² whichever is earlier

B. Upto 5.0 ppm feed iron



Bed depth	: 0.5 - 1.5 m, minimum
Service velocity	: 15 - 20 m/h
Backwash velocity	: 26 - 30 m/h
Bed wash bed expansion	: 40 - 50%
Backwash time	: 15 - 20 minutes
Backwash frequency	: 10 - 12 hrs or ΔP of 1.0 kg/cm ² whichever is earlier

Advantages

1. The wide particle size range of INDION ISR acts as a filter media, in addition to iron precipitation.
2. INDION ISR acts as a catalytic media and hence has a longer life.
3. INDION ISR does not require any chemicals for regeneration. Regeneration is possible with a water backwash.
4. The catalytic activity is faster in INDION ISR and hence requires less contact time and bed depth. This property makes it the ideal media for POU devices.
5. Due to spherical beads the media undergoes less compaction. This leads to less pressure drop across the bed.
6. Wide temperature range (15° C - 45° C).
7. Works well at lower level of alkalinity. This is an advantage when high TDS (>1000 ppm) water is treated for Iron removal.
8. No clinker formation and loss of activity due to improper backwash and storage in the vessel. The media can be removed from the vessel, cleaned and reused.

General guidelines for using INDION ISR

1. INDION ISR can be directly used to treat bore well water having suspended solids below 10 ppm. However pretreatment is required if suspended solids are high.
2. The media can treat water having an iron content above 10 ppm, but the process is not economical particularly for large flow rates. Hence it is recommended to remove iron by pretreating the water by aeration, followed by clarification and filtration. INDION ISR shall then be used as a polishing media.
3. Free chlorine should be removed before passing water through the media.
4. The treated water from INDION ISR will have an iron content in the range of 0.1 to 0.3 ppm. The feed water to ion exchange system or RO system requires iron below 0.1 ppm. The iron content of 0.3 ppm can be further reduced to 0.1 ppm and less after passing through sand filter, carbon filter or any other sediment filter by removal of fine colloidal iron precipitates.
5. INDION ISR removes dissolved iron from water which is present as ferrous iron. The iron can also exist in other forms such as Bacterial iron, Soluble organic iron and colloidal iron. This form of iron cannot be removed effectively by INDION ISR.
6. All the sequestering agents including polyphosphates and meta-phosphates should be added after the INDION ISR unit.
7. For high iron content in feed water (around 10 ppm), it is recommended to backwash the unit with treated water, so as to avoid contamination of bottom portion of the bed.
8. The unit must be backwashed at specified flow rate for effective removal of precipitated iron and suspended solids; else it can cause choking of media.
9. The backwash frequency shall be every 12 hours (twice a day) for continuous operating unit. If the unit is operated intermittently, the total operating time in service cycles shall be limited to 5-6 hours before next backwash.

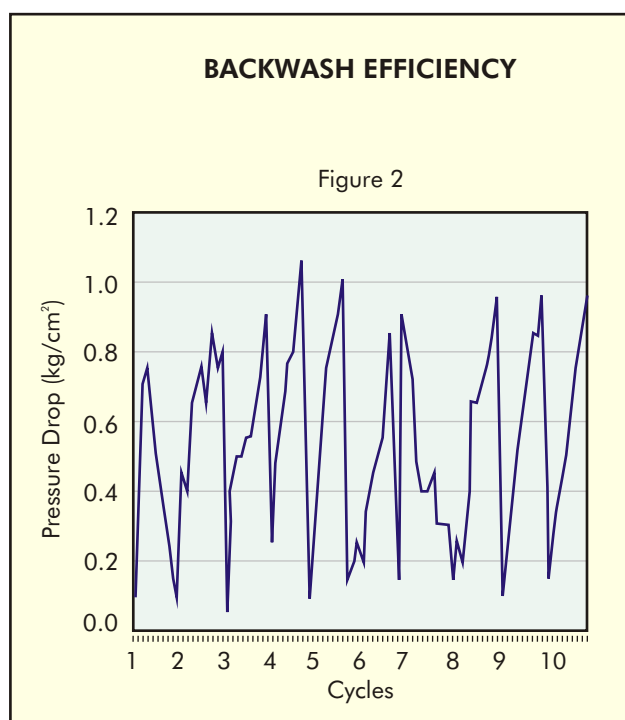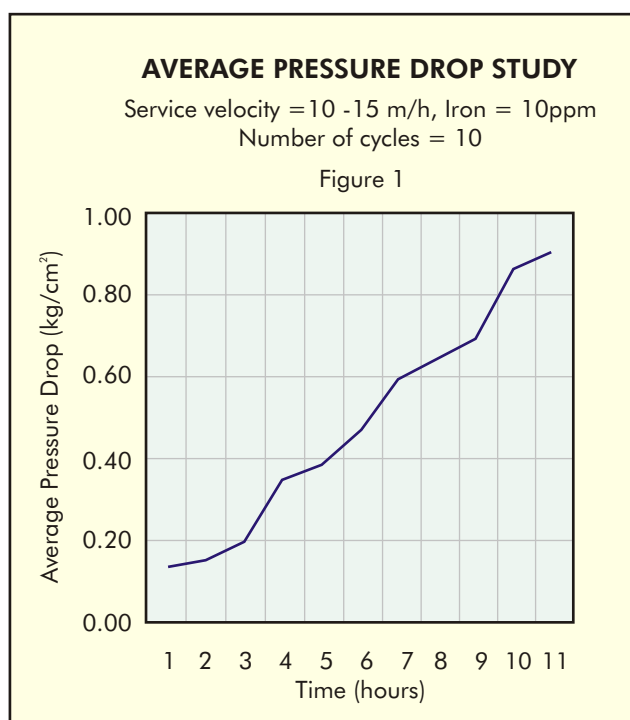

Packing

HDPE Lined bags	25/50 lts	LDPE bags	1 cft / 25 lts
Super sack	1000 lts	Super sack	35 cft
MS drums	180 lts	Fiber drums	7 cft
with liner bags		with liner bags	

Storage

Ion exchange resins require proper care at all times. The resins must never be allowed to become dry. Regularly open the plastic bags and check the condition

of the resin when in storage. If not moist, add enough clean demineralised water and keep it in completely moist condition. Always keep the resin drum in the shade. Recommended storage temperature is between 15° C and 45° C.

Safety

Acid and alkali solutions are corrosive and should be handled in a manner that will prevent eye and skin contact. If any oxidising agents are used necessary safety precautions should be observed to avoid accidents and damage to the resin.

INDION range of Ion Exchange resins are produced in a state of the art ISO 9001 and ISO 14001 certified manufacturing facilities at Ankleshwar, in the state of Gujarat in India. This product data sheet (issue 09/2008) replaces previous issues.

To the best of our knowledge the information contained in this publication is accurate. Ion Exchange (India) Ltd. maintains a policy of continuous development and reserves the right to amend the information given herein without notice.

INDION is the registered trademark



CORPORATE OFFICE

Ion House, Dr. E. Moses Road, Mahalaxmi, Mumbai 400 011
Tel: 022-3989 0909 Fax: 022-2493 8737
E-mail: ieil@ionexchange.co.in ; hocro@ionexchange.co.in

INTERNATIONAL DIVISION

R-14, T.T.C MIDC, Thane-Belapur Road, Rabale, Navi Mumbai 400 705
Tel: 022-3989 0909/3047 2400 Fax: 022-2769 7918
E-mail: rabcrointl@ionexchange.co.in; export.sales@ionexchange.co.in

OVERSEAS OFFICES

BANGLADESH

Tel: +880 2 8859426, 8861078/ +880 2 9871826(Dir.)
Fax: +880 2 8861079 E-mail: mj.sheikh@ionexchange.co.in

UAE

Tel: +971 6 5261606 Fax: +971 6 5261607
E-mail: suneeth.nair@ionexchange.co.in

THAILAND

Tel (Dir.): +66 2 692 4471 Fax: +66 2 692 2566 / 4472
Email :ieiap@ionexchange.co.in

EAST AFRICA

Mobile: +254-734590903/+254-712401056
E-mail : suhail.khan@ionexchange.co.in

SOUTH AFRICA

Tel/Fax: +27 11 4533815 Mobile: +27 796941057
E-mail: gourish.chakravorty@ionexchange.co.in

INDONESIA

Tel: +62 21 489 7212, 475 1013 Fax: +62 21 4788 2136
E-mail: ieiap@ionexchange.co.in

OMAN

Tel: +968 24790490 Fax: +968 24790491 Mobile : +968-99448679
E-mail: gaurav.khullar@ionexchange.co.in

MALAYSIA

Tel: +60 3 2162 0381 Fax: +60 3 2162 0391
E-mail: ieiap@ionexchange.co.in

USA

Tel (Dir.) : (510) 498-8418 Fax: : (510) 498-4466
Email: bmackrodt@ionexchangeglobal.com

CANADA

Tel : +416 712 3940 Fax: +905 497 4439
E-mail : malvin.kalsi@ionexchangeglobal.com

Visit us at : www.ionindia.com