

INDION[®] NSSR

Description

INDION NSSR is a macroporous strongly basic anion resin which is tailor made to suit removal of nitrate ions from water for potable uses. The proper mix of physico-chemical properties gives ideal nitrate exchange kinetics to this resin making suitable for nitrate removal in the presence of sulphate ions.

High concentration of nitrate in water is a potential

hazard for two reasons. The nitrate ions form complexes with the blood and in the long run cause oxygen depletion affecting human life. The flow of nitrate bearing water through iron pipes can cause depletion of oxygen leading to corrosion. In view of these difficulties use of an Ion Exchange resin is the preferred process for nitrate removal.

Characteristics

Appearance	:	Opaque off white to brown beads
Matrix	:	Styrene divinyl benzene copolymer
Functional Group	:	Quaternary ammonium
Ionic form as supplied	:	Chloride
Total exchange capacity	:	0.9 meq/ml, minimum
Moisture holding capacity	:	45 - 55 %
Non Spherical beads	:	10 %
Shipping weight *	:	670 kg/m ³ , approximately
Particle size range	:	0.3 to 1.2 mm
> 1.2 mm	:	5.0%, maximum
< 0.3 mm	:	1.0%, maximum
Uniformity co-efficient .	:	1.7, maximum
Effective size	:	0.40 to 0.50 mm
Maximum operating temperature	:	100 °C in Cl form
Operating pH range	:	0 to 14
Resistance to reducing agents	:	Good
Resistance to oxidizing agents	:	Generally good, chlorine should be absent
Osmotic stability	:	Excellent

Typical operating data

Bed Depth	:	1.0 m
Backwash	:	5 m ³ / h m ² for 5 to 10 minutes
Regenerant	:	NaCl
Regeneration level	:	125 kg of NaCl / m ³
Regenerant Concentration	:	5 - 10% w/v
Injection flow rate	:	2 - 4 bv/h
Slow rinse volume	:	2 bv
Slow rinse flowrate	:	At injection flowrate
Fast rinse volume	:	6 bv
Fast rinse flowrate	:	At service flowrate
Minimum Flow Greater than or equal to	:	0.082 gpm/ft ³
	:	0.660 LPH/Ltr Resin
	:	0.660 BV/hr

* Weight of resin, as supplied, occupying 1 m³ in a unit after backwashing and draining.

Operating capacity

Coflow regeneration :

Refer figure 1 for operating capacity for different regeneration levels.

Leakage :

The leakage of Nitrate (Coflow) at the outlet of NSSR column can be obtained from figure 3.

Countercurrent regeneration :

Refer figure 2 for operating capacity for different regeneration levels.

Leakage :



The leakage of Nitrate (CCR) at the outlet of NSSR column can be obtained from figure 4.





Pressure loss :

Refer figure 5 for pressure loss across the bed for different velocities and temperatures.

Bed expansion :

Refer figure 6 for % Bed expansion at different flow rates and temperatures.

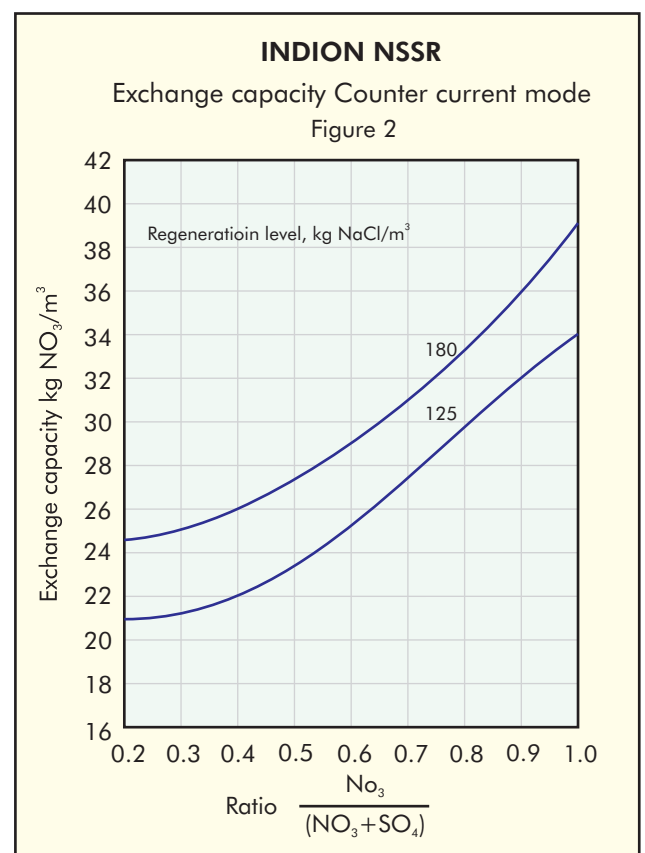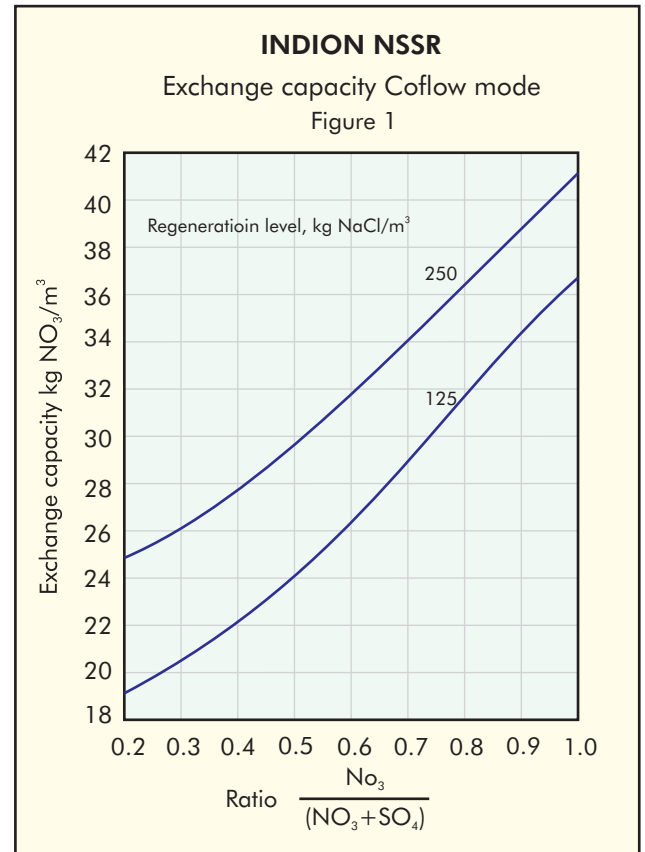

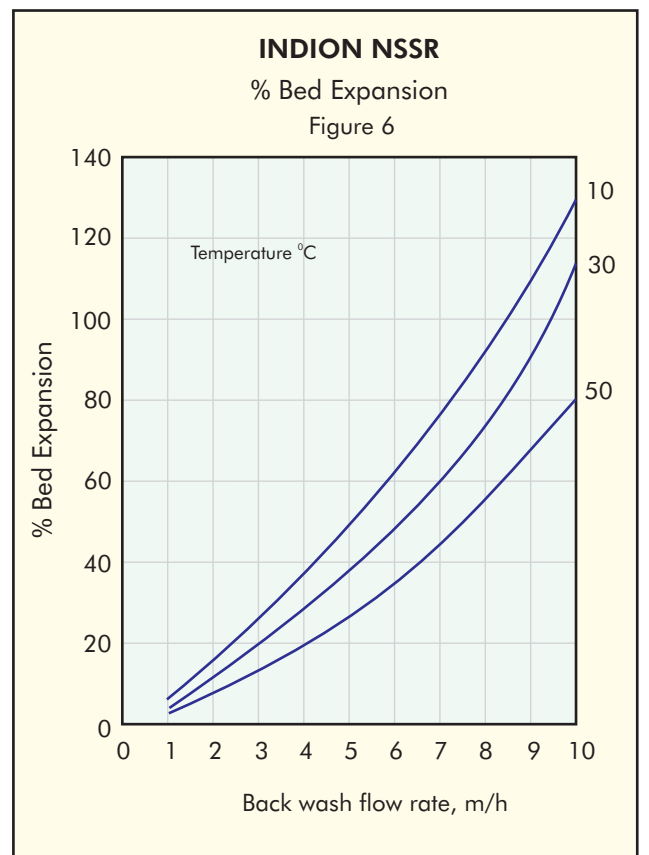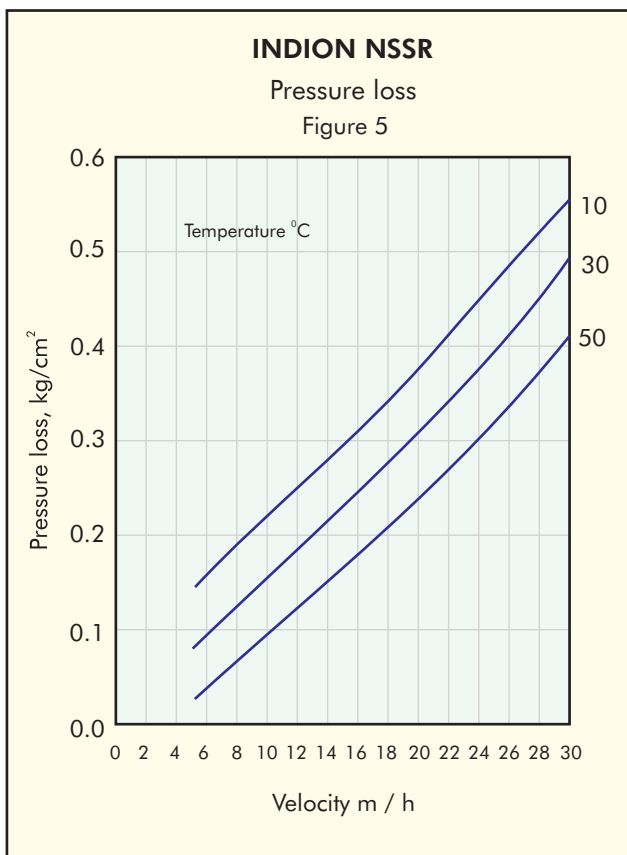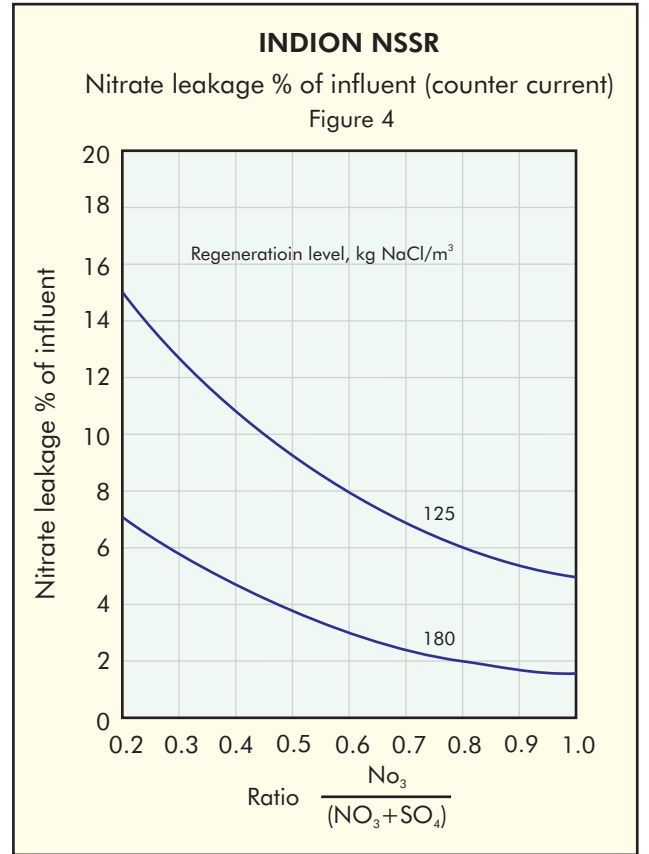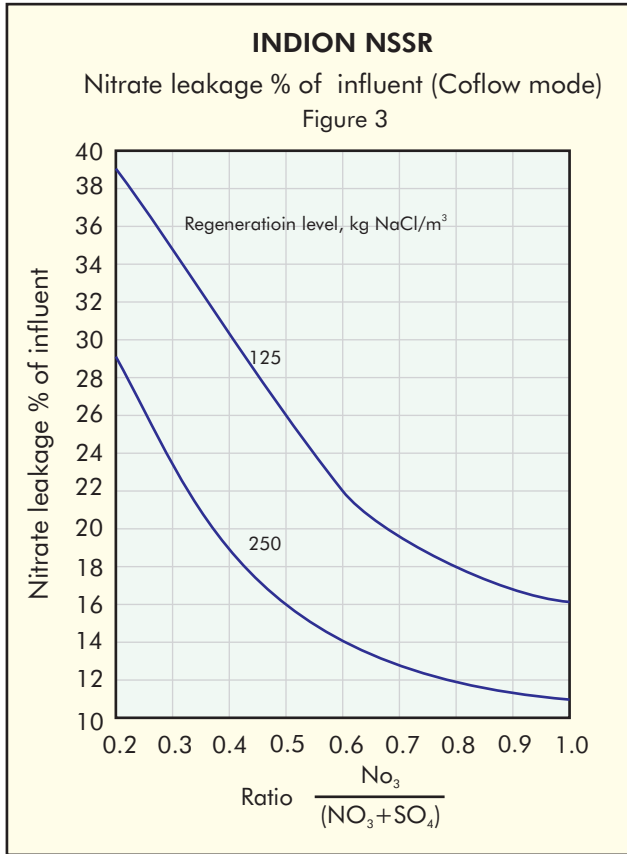

Use of good quality regenerants

All ion exchange resins are subject to fouling and blockage of active groups by precipitated iron. Hence the iron content in the feed water should be low and the regenerant must be essentially free from iron and heavy metals. All resins are prone to oxidative attack, resulting in problems such as loss of physical strength. Therefore, the regenerant should have as low chlorine content as possible. Good quality regenerant of technically or chemically pure grade should be used to obtain best results.

Packing

HDPE lined bags	25/50 lts	LDPE bags	1 cft/25 lts
Super sack	1000 lts	Super sack	35 cft
MS drums	180 lts	Fiber drums	7 cft
with liner bags		with liner bags	



CONFORMANCE STATEMENT:

This product conforms to NSF / ANSI Standard 61 and is certified with GOLD SEAL from WQA

INDION range of ion exchange resins are produced in a state of the art ISO 9001 and ISO 14001 certified manufacturing facilities at Ankleshwar, in the state of Gujarat in India. This product data sheet (issue 09/2008) replaces previous issues.

To the best of our knowledge the information contained in this publication is accurate. Ion Exchange (India) Ltd. maintains a policy of continuous development and reserves the right to amend the information given herein without notice.

INDION is the registered trademark of Ion Exchange (India) Ltd.



CORPORATE OFFICE

Ion House, Dr. E. Moses Road, Mahalaxmi, Mumbai 400 011
Tel: 022-3989 0909 Fax: 022-2493 8737
E-mail: ieil@ionexchange.co.in; hocro@ionexchange.co.in

INTERNATIONAL DIVISION

R-14, T.T.C MIDC, Thane-Belapur Road, Rabale, Navi Mumbai 400 705
Tel: 022-3989 0909/3047 2400 Fax: 022-2769 7918
E-mail: rabcrointl@ionexchange.co.in; export.sales@ionexchange.co.in

REGIONAL OFFICES

- **Chennai** - Tel: 044-3989 0909/3910 2900 Fax: 044-2815 3361
E-mail: checro@ionexchange.co.in
- **Delhi** - Tel: 011-3989 0909/3054 3200 Fax: 011-2577 4837
E-mail: delcro@ionexchange.co.in
- **Kolkata** - Tel: 033-3989 0909/3043 3400 Fax: 033-2400 4345
E-mail: calcro@ionexchange.co.in
- **Vashi** - Tel: 022-3989 0909/3913 2300 Fax: 022-2788 9839
E-mail: mumcro@ionexchange.co.in

Storage

Ion exchange resins require proper care at all times. The resin must never be allowed to become dry.

Regularly open the plastic bags and check the condition of the resin when in storage. If not moist, add enough clean demineralised water and keep it in completely moist condition. Always keep the resin drum in the shade. Recommended storage temperature is between 20° C and 40° C.

Safety

Acid and alkali solutions are corrosive and should be handled in a manner that will prevent eye and skin contact. If any oxidising agents are used, necessary safety precautions should be observed to avoid accidents and damage to the resin.

BRANCH OFFICES

- **Bangaluru** - Tel:-080-2204 2888
E-mail: bngcro@ionexchange.co.in
- **Bhubaneshwar** - Tel: 0674-326 9525
E-mail: bbsr@ionexchange.co.in
- **Chandigarh** - Tel: 0172-274 5011 Fax: 0172-274 4594
E-mail: delcro@ionexchange.co.in
- **Hyderabad** - Tel: 040-3066 3101/02/03 Fax: 040-3066 3104
E-mail: hydcro@ionexchange.co.in
- **Lucknow** - Tel: 0522-301 3401/02 Fax: 0522- 301 3401
E-mail: luk.general@ionexchange.co.in
- **Vadodara** - Tel: 0265-239 6506/6507 Fax: 0265-239 8508
E-mail: brdcro@ionexchange.co.in
- **Vizag** - Tel: 0891-324 6253
E-mail: sales.vizag@ionexchange.co.in

FACTORIES: • Ankleshwar • Hosur • Patancheru • Rabale • Verna

ALL INDIA NETWORK OF SERVICE COMPANIES AND DEALERS

Visit us at : www.ionindia.com